

BNC Male Video Balun (E10700A compatible)



**Video Balun
BNC Male to RJ45
Part Number: E10184S**



Rear View of RJ45 Jack

Features:

- 1 video path from BNC Male into 1 RJ45 jack unshielded.
- Bi-directional signal conversion.
- High Reliability and Durability
- Housed in a fire retardant wall mountable Case
- Impedance 75 to 100 Ohm
- High quality and performance
- Passive device (no power supply required)
- Stable over working temperature between 0 °C to +55 °C

Application:

In many security applications, video signal is carried over 75 ohm coaxial cabling and there is a need to convert to balanced transmission using lower cost 100 ohm twisted pair cables.

The video balun will enable video signal to be interfaced using coaxial on one side to twisted pair cabling on the other using modular RJ45 connectors to achieve quick and reliable connections.

The E10184S has specifically been designed to be compatible with the E10700A Versatile Hub, which allows a combination of Video only, Power Through and/or PTZ Cameras.


Specifications:

Bandwidth:	DC to 8MHz
Insertion Loss:	< 2 dB to 8MHz
Impedance:	75 ohm BNC, 100 ohm RJ45
Maximum Signal Voltage:	1.1 Vp-p
Return Loss:	> 15 dB to 8 MHz
Common Mode Rejection:	> 40 dB @ 8 MHz
RJ45 Contacts:	Gold, 50 micro inch
RJ45 Pin Out:	Video 7(+), 8 (-)
Temperature Range:	0 to 55 °C operating, 95% Relative Humidity
Casing:	Fire Retardant Plastic ABS UL 94V-0
Maximum Distance:	Color: Up to 400 m Cat 5e B&W: Up to 600 m Cat 5e

Compatible with: E10184SP / E10174 / E10522 / E10524 / E10700A (Video)

Note: Specifications subject to change without notice.

Typical Return Loss

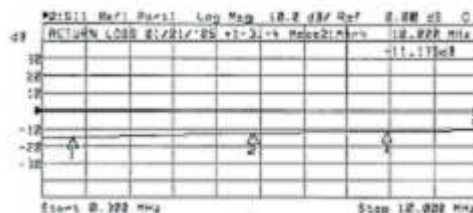

Drawing Outline

